

# ST56L

Ø56mm

LED 长亮/闪亮型 多层式指示灯 LED Steady/Flashing Tower Lamp

**ST56L** | LED 长亮型  
LED Steady


**ST56LF** | LED 长亮/闪亮型  
LED Steady/Flashing

**ST56L-BZ** | 内装蜂鸣器LED长亮型  
LED Steady With Buzzer

**ST56LF-BZ** | 内装蜂鸣器LED长亮/闪亮型  
LED Steady/Flashing With Buzzer



内装蜂鸣器的身体  
The body of this product has buzzer built-in.

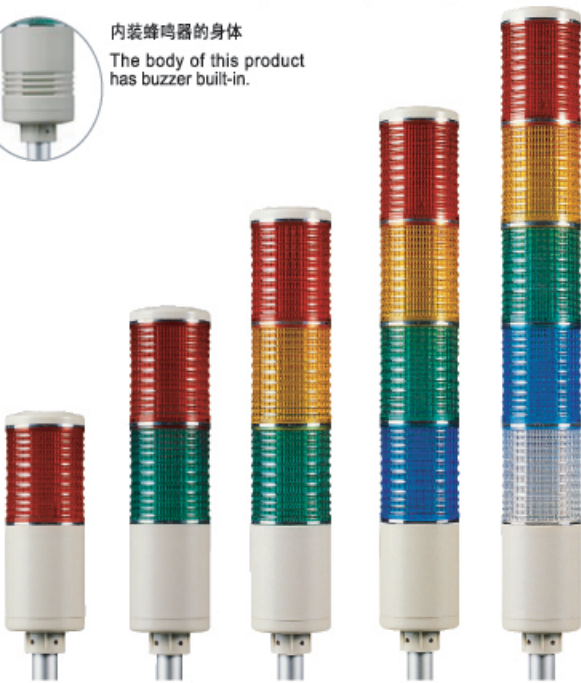

支架  
(Bracket)  
Mounting  
device

SCREW & NUT  
(标准 Standard)

LB18

LW18

SZ18

※ 详细尺寸请参照91页  
For a detailed dimension, please refer to page 91.


型号 Model	段数 Layer	电压 Rated Voltage	电流 Current	重量 Weight	颜色 Color
ST56L LED长亮 Steady	1	AC/DC12V	0.110A	0.36Kg	■红-R
		AC/DC24V	0.072A	0.36Kg	
		AC110V	0.040A	0.53Kg	
ST56LF LED 长亮/闪亮 Steady /Flashing	2	AC/DC12V	0.220A	0.45Kg	■红-R ■绿-G
		AC/DC24V	0.144A	0.45Kg	
		AC110V	0.049A	0.62Kg	
ST56L-BZ LED长亮 蜂鸣器 Steady with Buzzer	3	AC/DC12V	0.330A	0.53Kg	■红-R ■黄-A ■绿-G
		AC/DC24V	0.216A	0.53Kg	
		AC110V	0.058A	0.70Kg	
ST56LF-BZ LED 长亮/闪亮 Steady /Flashing with Buzzer	4	AC/DC12V	0.440A	0.62Kg	■红-R ■黄-A ■绿-G ■蓝-B
		AC/DC24V	0.288A	0.62Kg	
		AC110V	0.066A	0.79Kg	
	5	AC/DC12V	0.550A	0.70Kg	■红-R ■黄-A ■绿-G ■蓝-B ■白-W
		AC/DC24V	0.360A	0.70Kg	
		AC110V	0.073A	0.87Kg	
		AC220V	0.037A	0.87Kg	



带固定安装用支杆的Ø56mm高级型LED光源产品  
闪光面积是经济型产品的两倍，易于在远距离  
时显示光信号

- 采用了高亮度的发光二极管作为光源
- 闪光面积是经济型产品的两倍，在远距离时光信号可见度很好
- 接插型的构造，使得每一节的颜色更换及维修更加容易
- 闪亮数：60-80/min.
- 蜂鸣器内装型，音量：90dB \*可以定做2音蜂鸣器
- 主要材料：灯罩-AS，灯座-ABS，支杆-AL
- 技术认证：CE 保护等级：IP23
- Luxury product of 56mm pole installation type with high-brightness LED as light source
- High in visibility with light diffusion area two times as large as in economical product
- Easy to change color kit, repair and maintain with connector globe-type structure
- Flashes : 60-80/min.
- Built-in buzzer type volume : 90dB
- Certification: CE \*Protection class: IP23

### 外形图 (External view drawing)

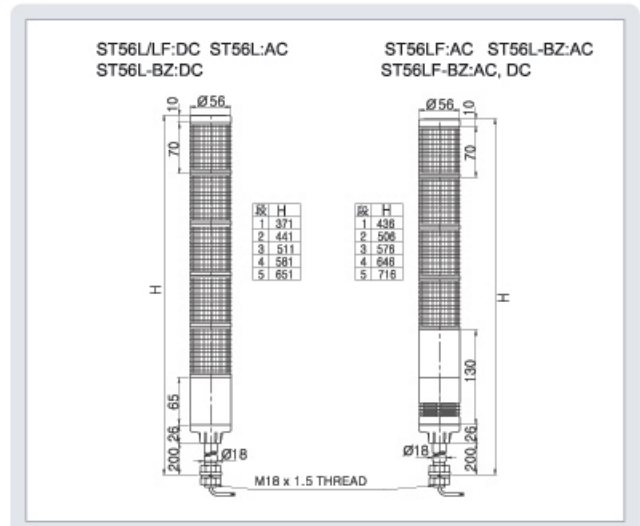

### 接线图 (Connection Diagram)

※ 请参照90页  
For a connection diagram, please refer to page 90.

### ST56L SERIES 产品指定 (Order Specification)

ST56L - 3 - 220 - RAG - (LB18)	型号(Model)	段数(Layer)	电压(Voltage)	颜色(Color)	支杆(Bracket)
ST56L	-1-1段	-12-DC12V	■红-Red	·无指定(None)	
ST56L-BZ	-2-2段	-24-DC24V	■A-黄(Amber)	Standard	
ST56LF	-3-3段	-110-AC110V	■G-绿(Green)	·指定(Bracket)	
ST56LF-BZ	-4-4段	-220-AC220V	■B-蓝(Blue)	LB18	
	-5-5段		■白(white)	LW18	
				SZ18	

- ※ 颜色排列由使用者指定
- ※ AC用每一节的直接电源连接方式是订做规格。  
- 接线时电源线跟电压 DC产品(ST56L)同样，产品的高度有变化
- ※ Product user may select the combination of colors.
- ※ Direct power supply to each layer for AC is custom-made.
- ※ For connection, power supply line is same in type as in DC(ST56L) and changeable in total height.

# ST56ML

Ø56mm

LED 长亮/闪亮型 多层式指示灯 LED Steady/Flashing Tower Lamp

**ST56ML** | LED长亮型  
LED Steady


**ST56MLF** | LED长亮/闪亮型  
LED Steady/Flashing

**ST56ML-BZ** | 内装蜂鸣器 LED 长亮型  
LED Steady With Buzzer

**ST56MLF-BZ** | 内装蜂鸣器 LED 长亮/闪亮型  
LED Steady/Flashing With Buzzer



内装蜂鸣器的身体  
The body of this product has buzzer built-in.

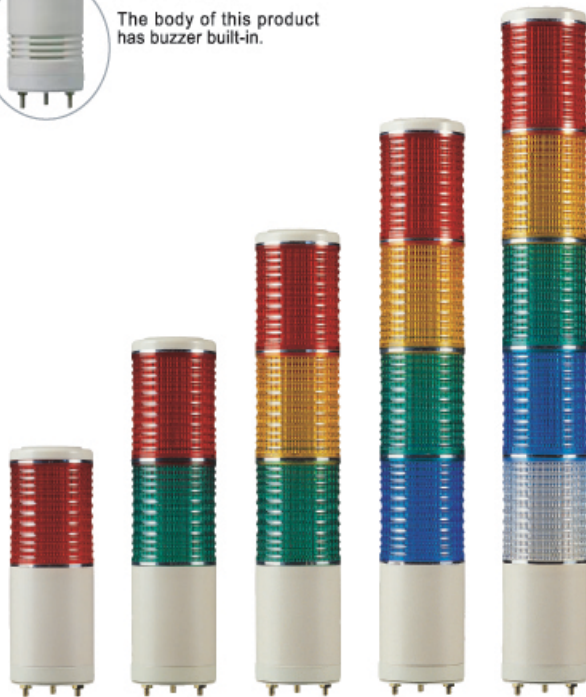

型号 Model	段数 Layer	电压 Rated Voltage	电流 Current	重量 Weight	颜色 Color
ST56ML LED长亮 Steady	1	AC/DC12V	0.110A	0.21Kg	■红-R
		AC/DC24V	0.072A	0.21Kg	
		AC110V	0.040A	0.38Kg	
ST56MLF LED 长亮/闪亮 Steady /Flashing	2	AC/DC12V	0.220A	0.29Kg	■红-R ■绿-G
		AC/DC24V	0.144A	0.29Kg	
		AC110V	0.049A	0.46Kg	
ST56ML- BZ LED长亮 蜂鸣器 Steady with Buzzer	3	AC/DC12V	0.330A	0.38Kg	■红-R ■黄-A ■绿-G
		AC/DC24V	0.216A	0.38Kg	
		AC110V	0.058A	0.55Kg	
ST56MLF- BZ LED 长亮/闪亮 蜂鸣器 Steady /Flashing with Buzzer	4	AC/DC12V	0.440A	0.46Kg	■红-R ■黄-A ■绿-G ■蓝-B
		AC/DC24V	0.288A	0.46Kg	
		AC110V	0.066A	0.63Kg	
	5	AC/DC12V	0.550A	0.55Kg	■红-R ■黄-A ■绿-G ■蓝-B ■白-W
		AC/DC24V	0.360A	0.55Kg	
		AC110V	0.073A	0.72Kg	
		AC220V	0.037A	0.72Kg	

信号线, 蜂鸣器线电流 (1段标准) (Signal, Buzzer Line Current-1Layer)


电压 Rated Voltage	AC/DC12V	AC/DC24V	AC110V	AC220V
信号线电流 Signal Line Current	0.110A	0.072A	0.040A	0.020A
蜂鸣器线电流 Buzzer Line Current	0.015A	0.028A	0.021A	0.038A



## 加装蜂鸣器的小型多功能多层式指示灯 LED光源 Ø56mm 自立安装型产品

- 产品采用了高亮度的发光二极管 (LED)
- 闪光面积是经济型产品的两倍, 便于在远距离时观察光信号
- 接插型的构造, 使得每一节的颜色更换及维修更加容易
- 闪亮数60-80/min.
- 蜂鸣器内装音量: 90dB \*可以定做2音蜂鸣器
- 主要材料: 灯罩-AS, 灯座-ABS
- 技术认证: CE 保护等级: IP23
- Luxury product of 56mm self-standing type with high-brightness LED as light source
- High in visibility with light diffusion area two times as large as it in economical product
- Easy to change color kit, repair and maintain with connector globe-type structure
- Flashes/min. : 60-80/min.
- Built-in buzzer type volume : 90dB
- Material : Lens-AS, Body-ABS
- Certification: CE Protection class: IP23

### 外形图 (External view drawing)

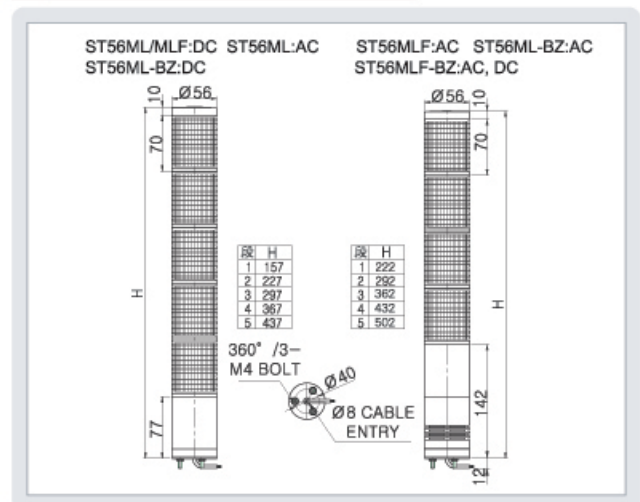

### 接线图 (Connection Diagram)

\*请参照90页。  
For a connection diagram, please refer to page 90.

### ST56ML SERIES 产品指定 (Order Specification)

ST56ML	-	2	-	24	-	RG
型号(Model)	段数(Layer)	电压(Voltage)	颜色(Color)			
·ST56ML	·1-1段	·12-DC12V	■R-红(Red)			
·ST56ML-BZ	·2-2段	·24-DC24V	■A-黄(Amber)			
·ST56MLF	·3-3段	·110-AC110V	■G-绿(Green)			
·ST56MLF-BZ	·4-4段	·220-AC220V	■B-蓝(Blue)			
	·5-5段		■W-白(white)			

\* 颜色排列由使用者指定  
\* AC用每一节的直接电源连接方式是订做规格。  
- 接线时电源线跟电压 DC产品 (ST56ML) 同样, 产品的高度有变化

\* Product user may select the combination of colors.  
\* Direct power supply to each layer for AC is custom-made.  
- For connection, power supply line is same in type as in DC(ST56ML) and changeable in total height.